

Specifications

Supply: all AC units are for 50/60Hz

BDHRM:	24, 110, 220vac ±15%; 12-24, 36-80, 110vdc ± 10%
EZM3735:	10-30vdc, 115, 230vac ± 15%
T12:	11-28vdc, 32-48vdc, 115vac, 230vac
T41:	10-80vdc
T50:	10- 80vdc, 24vac, 115vac, 230vac
T55, 502/503HRD/M:	120, 240vac

Power Consumption:

BDHRM:	2W @ 220vac, 1.8W @ 12vdc
EZM3735:	1.5VA
T12:	6mA (50mA with LED and relay on)
T41:	.03w @12vdc, 0.7w @48vdc
T50:	0.4w vac, .03w @12vdc, 0.7w @48vdc
T55, 502/503HRD/M:	0.6VA@120vac

Operating Temperature:

BDHRM, T55:	-15 to +50°C
EZM3735, 502/503HRD/M:	-30 to +80°C
T12, T41, T50:	-30 to +65°C

Enclosure:

BDHRM, T55:	Nema 1
EZM3735 502/503HRD/M:	Nema 5 & 4X
T12, T41, T50A, T50E:	Nema 5
T50B:	Nema 4X

Digits Height:

BDHRM, T50:	4mm (0.14")
EZM3735:	14mm (0.55")
T12:	7mm (0.28")
T41:	3mm (0.12")
T55, 502/503HRM:	5mm (0.18")
502/503HRD:	9mm (0.375")

Spécifications

Alimentation: fonctionnent à 50/60Hz

BDHRM:	24, 110, 220vca ± 15%; 12-24, 36-80, 110vcc ± 10%
EZM3735:	10-30vcc, 115, 230vca ± 15%
T12:	11-28vcc, 32-48vcc, 115vca, 230vca
T41:	10-80vcc
T50:	10- 80vcc, 24vca, 115vca, 230vca
T55, 502/503HRD/M:	120, 240vac

Consommation:

BDHRM:	2W @ 220vca, 1.8W @ 12vcc
EZM3735:	1.5VA
T12:	6mA (50mA avec DEL & relais alimentés)
T41:	.03w @12vcc, 0.7w @48vcc
T50:	0.4w vca, .03w @12vcc, 0.7w @48vcc
T55, 502/503HRD/M:	0.6VA@120vca

Limites de température:

BDHRM, T55:	-15 à +50°C
EZM3735, 502/503HRD/M:	-30 à +80°C
T12, T41, T50:	-30 à +65°C


Boîtier:

BDHRM, T55:	Nema 1
EZM3735 502/503HRD/M:	Nema 5 & 4X
T12, T41, T50A, T50E:	Nema 5
T50B:	Nema 4X

Caractères (grandeurs):

BDHRM, T50:	4mm (0.14")
EZM3735:	14mm (0.55")
T12:	7mm (0.28")
T41:	3mm (0.12")
T55, 502/503HRM:	5mm (0.18")
502/503HRD:	9mm (0.375")

Dimensions

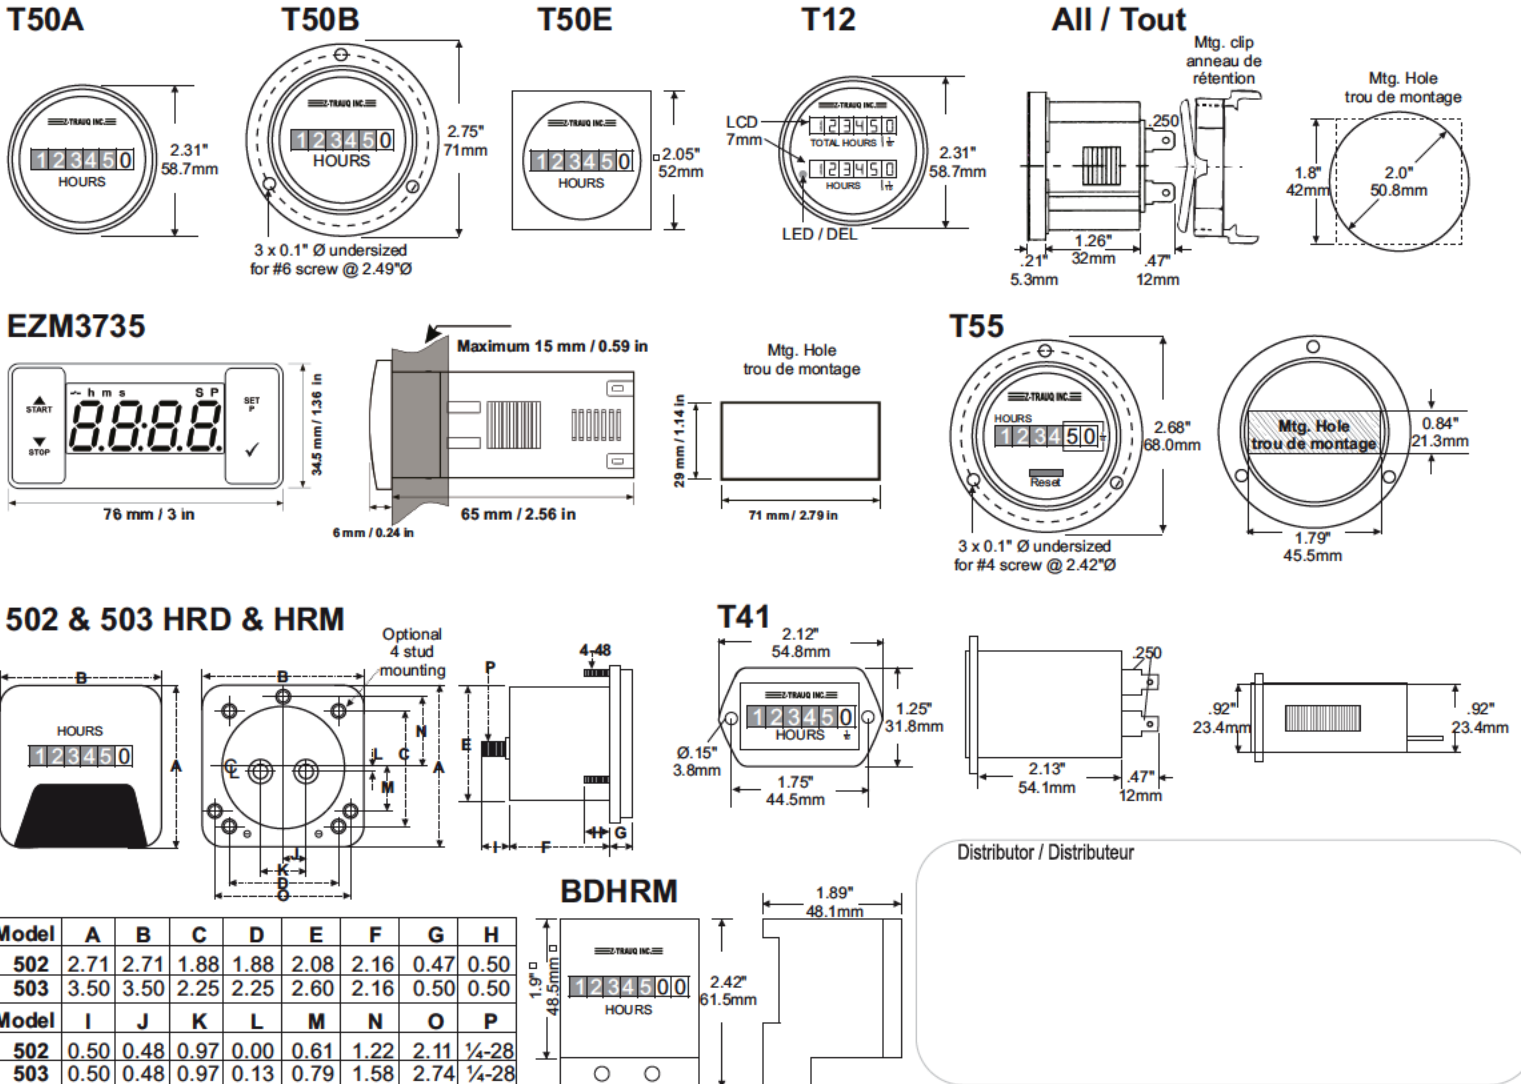

Distributor / Distributeur