


Potential Transformers

Continuous Thermal Rating: 75VA at 30°C. amb.;
50VA at 55°C. amb.

Insulation Class: 0.6 kV. BIL 10kV. full wave 60 Hz.
Phenolic housing, UL94VO.

Standard 120VAC secondary.
Accuracy: 0.6% at 7.5VA, 60Hz

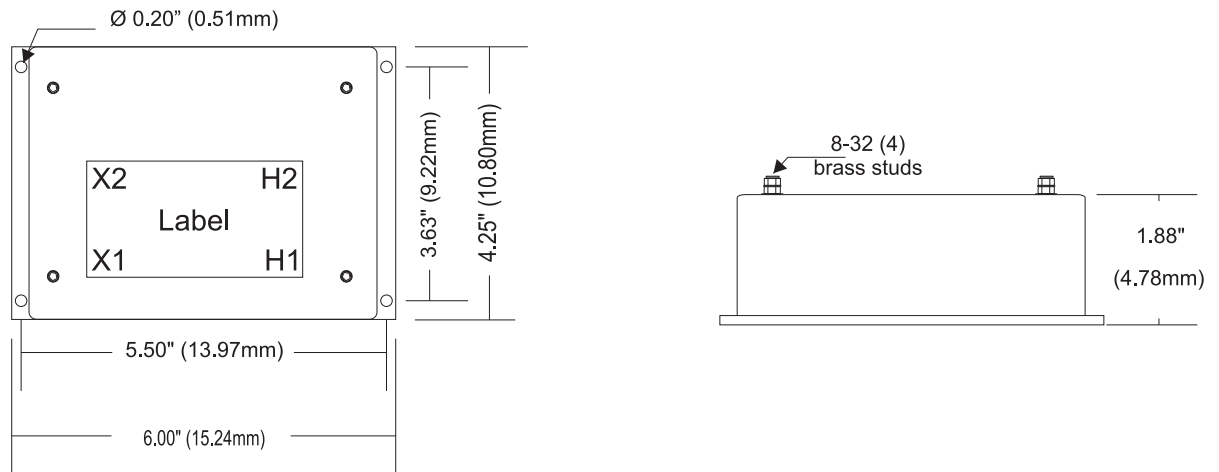

To order, please complete the model number with the appropriate suffix.
eg. PT2660-05

Model nbr.
PT2660

Catalogue nbr. Suffix	Ratio	Primary Voltage	Hz
-07	1:1	120	60
-01	1.73:1	208	60
-02	2:1	240	60
-06	2.31:1	277	60
-03	3.17:1	380	50/60
-04	4:1	480	60
-05	5:1	600	60

- ▶ Terminals are brass no. 8-32
- ▶ Use of a 0.5 amp fuse in the secondary is recommended.
- ▶ Optional fusing for line-to-line or line-to-neutral connection is available.
- ▶ Approximate weight is 3 lb.