

≡≡≡ Z-TRAUQ INC. ≡≡≡

Current Transformer

CT189ASFT






UL[®]
E472409



CSA[®]
C US
263805

Dimensions

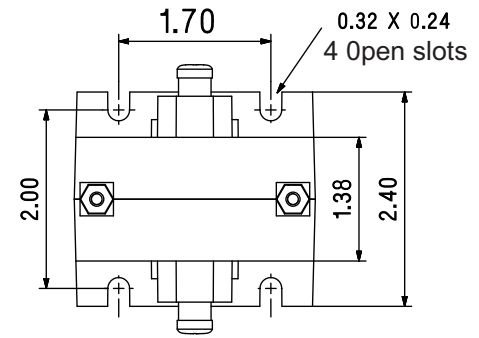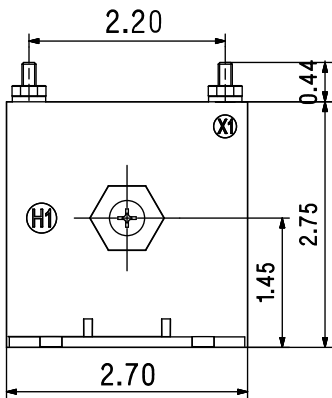

*Dimensions are in inches

Specifications

Current Ratio	ANSI METERING CLASS @ 60 HZ	
	B0.1	B0.2
2.5:5	0.6	0.6
5:5	0.6	0.6
7.5:5	0.6	0.6
10:5	0.6	0.6
15:5	0.6	0.6
20:5	0.6	0.6
25:5	0.6	0.6
30:5	0.6	0.6
40:5	0.6	0.6
50:5	0.6	0.6
60:5	0.6	0.6
75:5	0.6	0.6
80:5	0.6	0.6
100:5	0.6	0.6

FREQUENCY: 50 -400 Hz

INSULATION LEVEL: 600 Volts. 10kV BIL. full wave

APPROXIMATE WEIGHT: 0.75 lbs

CONNECTIONS: Primary terminals for the Model 189 for ratios of 30:5 and below are No. 10-32 brass screws with one lock washer (Dimension A=3.28), for ratios 40:5 and above, 3/8-16 brass studs with one lock washer and regular nut (Dimension A=4.10)

Application

Generally for ammeters use only

Distributed by

Distribué par

