


Current Transformers



Window Diameter: 4.25"
Continuous Thermal Rating: 1.33 at 30 C. amb.;
1.0 at 55 C. amb. Average.


Application: Ammeters and Wattmeters and Relays.
Insulation Class: 0.6 kV. BIL 10kV. full wave 50-400 Hz.
Fully encapsulated.

Standard 5 amp secondary, others available.

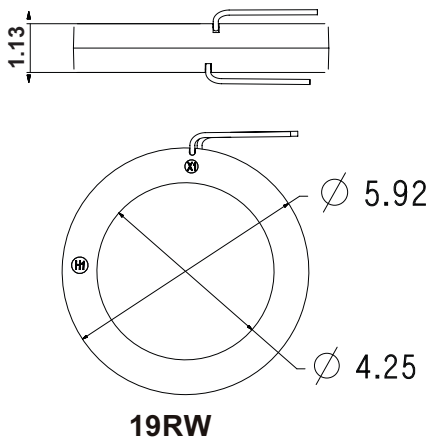

19RW

All dimensions in inches

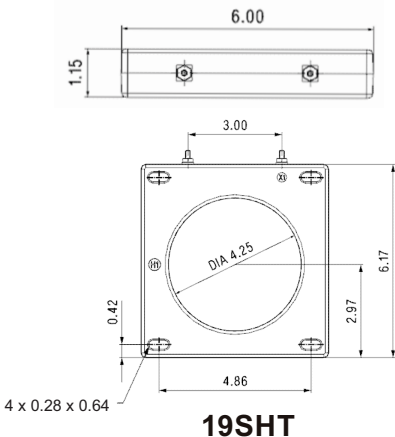

19SHT

To order, please complete the model number with the appropriate suffix.
eg. CT19RW600

- Flexible leads are UL 1015 105°C.
- CSA approved, # 16 AWG 24" long. Nonstandard length to be specified.
- Terminals are brass No. 8-32 UNC.
- Approximate weight 1.75 lb.
- Additional ratios available.
- Bracket is ordered separately.

Model nbr.	Catalogue nbr. Suffix	Current Ratio	VA for ±1% Class	ANSI Metering Class @ 60Hz			
				BO.1	BO.2	BO.5	BO.9
19RW	-301	300:5	4	0.6	1.2	2.4	-
19SHT	-401	400:5	10	0.3	0.6	1.2	-
	-501	500:5	15	0.3	0.6	1.2	-
	-601	600:5	15	0.3	0.3	0.6	1.2
	-701	700:5	25	0.3	0.3	0.6	0.6
	-801	800:5	30	0.3	0.3	0.6	0.6
	-102	1000:5	30	0.3	0.3	0.6	0.6
	-122	1200:5	40	0.3	0.3	0.3	0.6
	-152	1500:5	15	0.3	0.3	0.6	1.2
	-162	1600:5	15	0.3	0.3	0.3	0.6
	-202	2000:5	20	0.3	0.3	0.3	0.6
	-252	2500:5	20	0.3	0.3	0.3	0.3
	-302	3000:5	25	0.3	0.3	0.3	0.3
	-402	4000:5	25	0.3	0.3	0.3	0.3