


Current Transformers


Window Diameter: 6.50"
Continuous Thermal Rating: 1.33 at 30°C. amb.;
1.0 at 55°C. amb. Average.
Standard 5 amp secondary, others available.

Application: Ammeters and Wattmeters and Relays.
Insulation Class: 0.6 kV. BIL 10kV. full wave 50-400 Hz.
Constructed of 35kV polyurethane resin & fully
encapsulated under vacuum.   

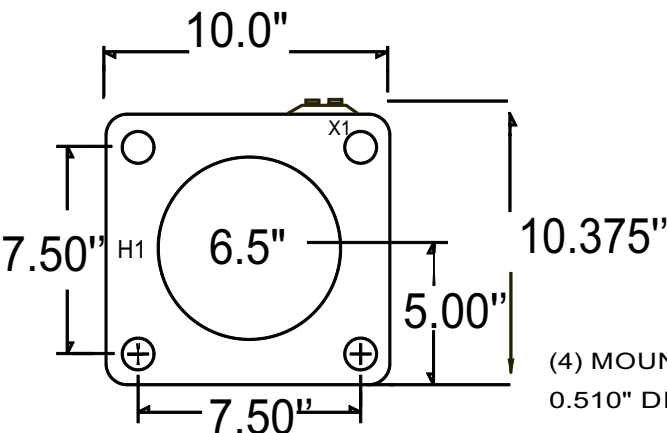

(4) MOUNT HOLES
0.510" DIAMETER.

Dimensions in inches

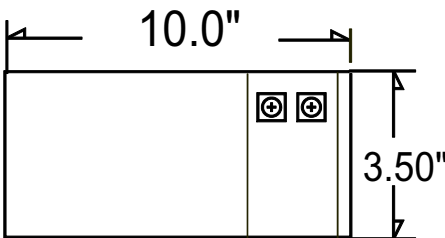

To order, please complete the model
number with the appropriate suffix.
eg. CT65103SH-1000

- Terminals are brass No. 10-32 UNC.
- Optional mounting bracket 65115MBK.
- Approximate weight 43 lb.
- Additional ratios available.

Model nbr.	Catalogue nbr. Suffix	Current Ratio	VA for $\pm 1\%$ Class	ANSI Metering Class @ 60Hz				
				BO.1	BO.2	BO.5	BO.9	B1.8
65103SH	-100	100:5	C10	1.2	2.4	-	-	-
	-200	200:5	C20	0.3	0.6	1.2	2.4	-
	-400	400:5	C50	0.3	0.3	0.6	1.2	2.4
	-600	600:5	C100	0.3	0.3	0.3	0.6	1.2
	-750	750:5	C100	0.3	0.3	0.3	0.3	0.3
	-800	800:5	C100	0.3	0.3	0.3	0.3	0.3
	-1000	1000:5	C200	0.3	0.3	0.3	0.3	0.3
	-1200	1200:5	C200	0.3	0.3	0.3	0.3	0.3
	-1500	2500:5	C200	0.3	0.3	0.3	0.3	0.3
	-2000	2000:5	C200	0.3	0.3	0.3	0.3	0.3
	-3000	3000:5	C200	0.3	0.3	0.3	0.3	0.3
	-4000	4000:5	C200	0.3	0.3	0.3	0.3	0.3

N.B. Ratios of 4000:5 and greater have a
Rf. of 1.0 @ 30°C amb.