


Generator Protection

Meters

Volts
Amps
Frequency
Hours



LED indicates machine needs servicing

SPDT output

sound an alarm and/or the machine




Non resettable total run time

Programmable (set to the time until the machine requires maintenance)

Battery Voltage Monitor



9 to 28vdc
Monitors its own supply
8A SPDT output
Only 3/4" wide

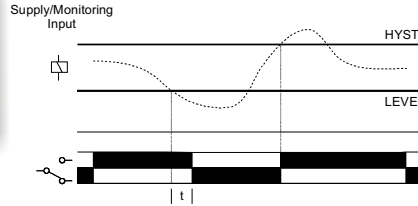


M1BVR

Mounting

for Heavy Vibration Areas

DIN Track or Direct

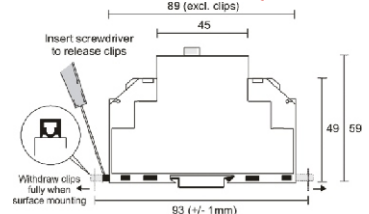


Making the Transfer

The B1DFM is programmable from 1/4 sec to 60 min before transferring to emergency. Does not use batteries.



Connection diag.



24 - 240 vac/dc

True Off Delay Timer

Shunt Generators in Parallel

A shunt generator's voltage drops if it tries to take on more than its share of a load. This characteristic allows this type of generator to be easily paralleled.

Synchronising check relays monitor two AC supplies for correct voltage, frequency and phase angle.

Order **70 SCD** for DEAD bus and **70 SCRL** for LIVE bus applications. Specify voltage.

To detect REVERSE CURRENT order **70RPR**. Specify voltage; 3 or 4 wire system.



From stock at

helping you keep the lights on